




Certificate No. 3907

# SCHIRTEC®

## SCHIRTEC LIGHTNING CONDUCTORS INSTALLATION CHART\*

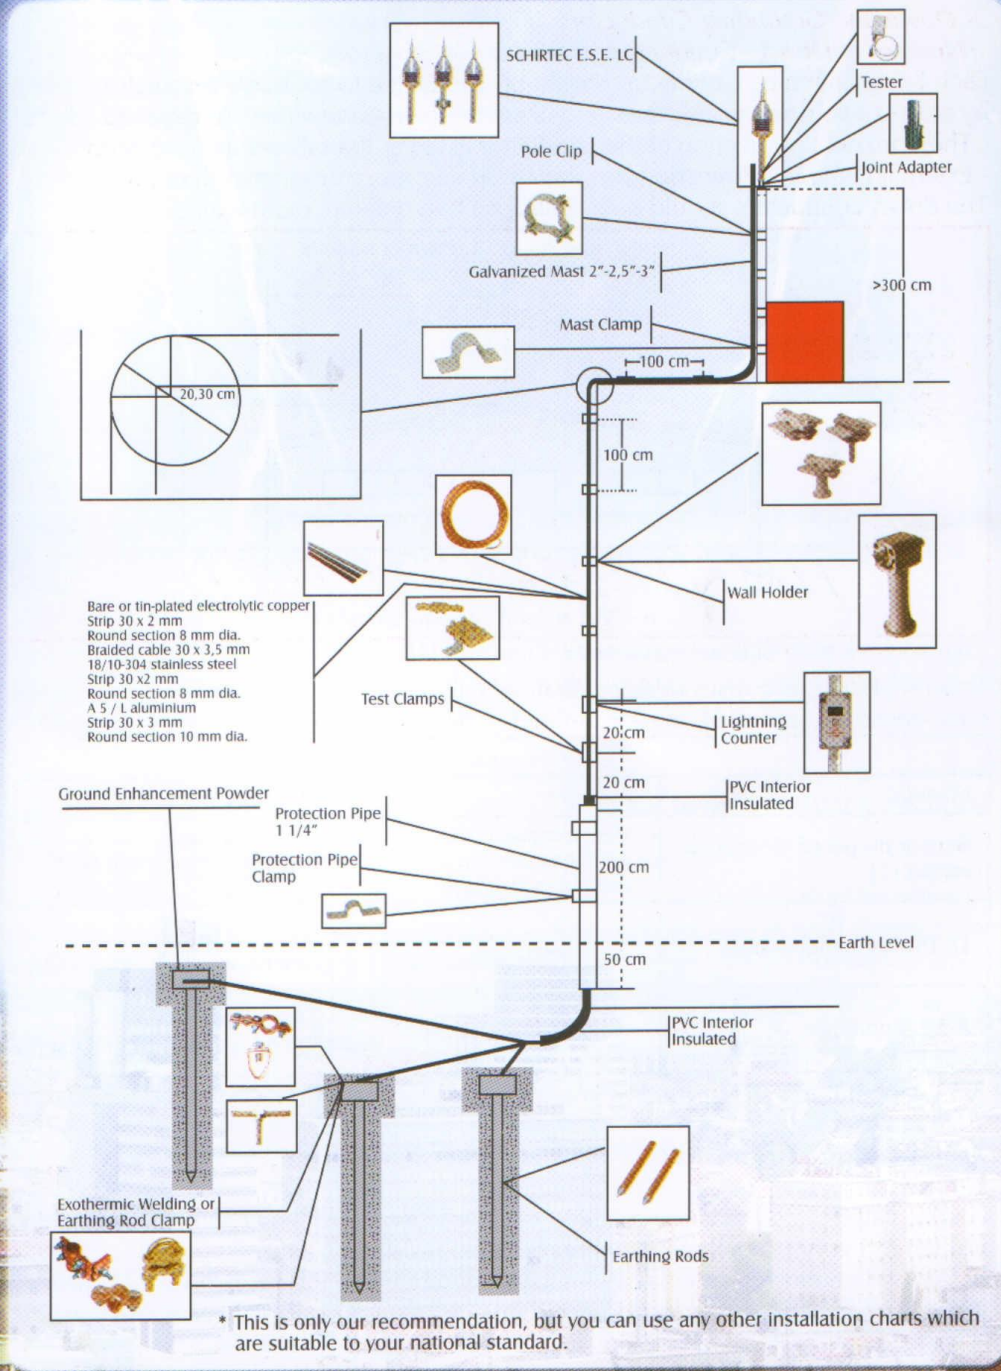

\* This is only our recommendation, but you can use any other installation charts which are suitable to your national standard.

## The Details of External Lightning Protection Systems

### 1- E.S.E. Lightning Conductor Head

Early Streamer Emission Lightning Conductor for large area protection.

### 2- Lightning Conductor Mast

The E.S.E. Lightning Conductor height may be increased by means of an elevation mast. We recommend, Lightning Conductor Mast should be galvanized steel, is to be 6 m in length and 60mm in diameter, down conductor must be fix spread to specific distance that must be 1m with vertical.


### 3- Down and Grounding Conductors

#### Number of Down - Conductors

Each E.S.E. Lightning Conductor should be connected to the earth termination system by at least one down conductor. Two or more down-conductors are required when:

- The horizontal projection of the conductor is larger than its vertical projection.
- External Lightning Protection is installed on any structures higher than 28m.

The down-conductors should be installed on two different main walls.

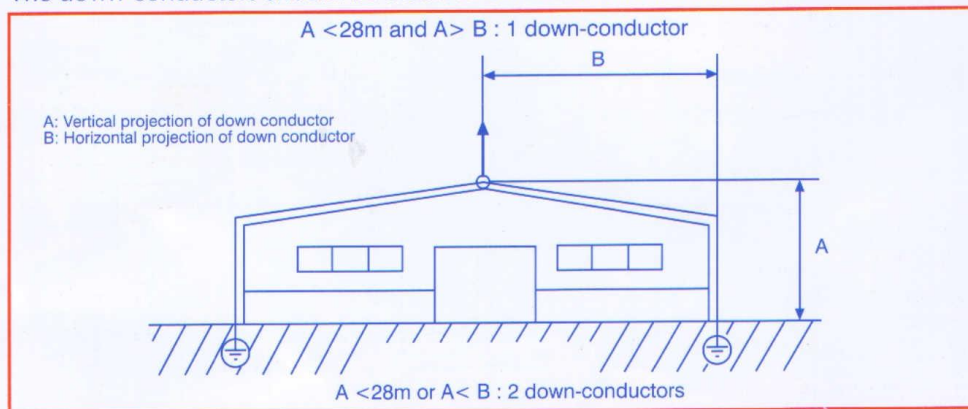

(Figure 1) - Number of down-conductors

Down-conductors consist of strips, braided cables, or round sections. Their minimum cross-sectional area of 50 mm<sup>2</sup> is defined in below table.

Down-conductors		
Material	Remarks	Minimum dimensions
Bare or tin-plated electrolytic copper (1)	Recommended for its good conductivity and corrosion resistance	Strip: 30x2 mm Round section: 8 mm dia.(2) Braided cable: 30x3,5 mm
18/10-304 stainless steel	Recommended in certain corrosive environments.	Strip : 30x2 mm Round section: 8 mm dia.(2)
A 5/L aluminium	To be used on aluminium surfaces (cladding,curtain- walls)	Strip : 30x3 mm Round section : 10 mm dia.(2)

A 5/L aluminium To be used on aluminium surfaces (cladding,curtain- walls) Strip : 30x3 mm

Round section : 10 mm dia.(2)

#### Notes :

(1) Tin-plated copper is recommended in view of its physical,mechanical and electrical properties ( conductivity,malleability,corrosion resistance, etc.)

(2) As the lightning current has an impulse characteristic, the flat conductor is preferred to the round conductor since its outside surface area is larger for a given cross-sectional area.


It must be fixed mounting surface with conductor fixing internal distance is 1 m. It should be installed in such a way that its path as direct as possible. It should be as straight as possible along the shortest path without sharp bends or upward sections. As seen figure, It is connected  $d/L$ . (Figure 2)

Where;  $d$ : safety distance,  $L$ : the length of conductor according to Schock voltages the average max. value, approximately is not be a jumping danger for  $L < 20 d$ .

The down conductors should not be routed along or across electrical conduits. However, when electrical conduit crossing is unavoidable, the electrical conduit should be placed inside a metal screen which extends 1 m beyond the point of crossing. The screen should be connected to the down conductor.

Routing round parapet walls should be avoided. Provisions should be made to ensure that down conductors paths are as direct as possible.

However, a maximum height increase of 40 cm is permissible for passing over a parapet wall with a slope of  $45^\circ$  or less. (Figure 2)

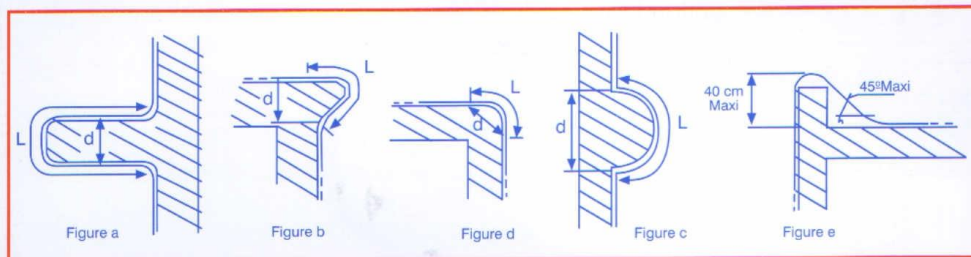

(Figure 2)

#### 4- Protective Cover

It protects the down-conductors against mechanical damages. You can use u profile or pipe. For prevent to lightning change down conductors must be connected pipe or u profile.

#### 5- Lightning Strike Counter

When a lightning strike counter is used for match the number of lightning stroke.

It should be installed on the most direct down conductor above the test clamp and in any case at height of about 2m. above ground level.

#### 6- Test Clamp

According to down conductor, covered plastic, is provided to measure for earth resistance, in an accessible position on each main earthing conductor between earthing electrode and must be over protective tube.

#### 7- Earth Termination

You should use reliable earth electrodes according to IEC 62305-3. They shall be extensible a driven as deep as earth conduction allow (over 50cm) and located at such distance from one other that maximum current likely to flow through one of they do not significantly effect the potential of the other's (5 m). Earth Resistance is less than 10 Ohm.

#### 8- Mounting

It must be looked after corrosion between different materials and avoided to use different materials as much as possible. The wall's surface must not be destroyed to fixing the carrier pole,conductor clips. It must be provided both canal digs for grounding system and ground on which a building must be rebuilt for grounding system.

#### 9- Project

It must be projected to mounting in truth.

#### 10- Test Report

After the installation is finished, earth resistance must be measured by the authorized personel and than it must be reported and approved by an authorized engineer.

**S**  
**SCHIRTEC**  
 SURGE PROTECTION SYSTEMS

Home and office application

M - Main switchboard  
 S - Subdistribution switchboard  
 T - TV set  
 C - Security camera  
 S - Server computer

<http://www.schirtec.at>

ISO 9001  
 TUV  
 ICMET

**S**  
**SCHIRTEC**  
 SCHIRTEC E.S.E. LIGHTNING CONDUCTORS

SCHIRTEC-A  
 BET  
 TUV  
 OSTERREICH

SCHIRTEC-DA  
 ICMET  
 ISO 9001  
 TUV

<http://www.schirtec.at>

**S**  
**SCHIRTEC**  
 VARIOUS PRODUCTS

<http://www.schirtec.at>

ISO 9001  
 TUV

**S**  
**SCHIRTEC**  
 VARIOUS PRODUCTS

LIGHTNING STRIKE COUNTER  
 LC-TESTER

<http://www.schirtec.at>

ISO 9001  
 TUV

**S**

**SCHIRTEC**  
 SCHIRTEC Trading GmbH

Ignaz - Köck Strasse 10/ Top 1.6 (Bürohaus Tech 21)  
 A-1210 Wien / AUSTRIA

e-mail : [info@schirtec.at](mailto:info@schirtec.at)    [office@schirtec.at](mailto:office@schirtec.at)    web : [www.schirtec.at](http://www.schirtec.at)